HSF

NOTES:
Current Rating: 1.0AMP
Contact Resistance: 20mΩ Max
Withstand Voltage: 500V AC/DC
Insulation Resistance: 1000MΩ Min
Operation Temperature: −40℃ to +105℃

Contact Material:Phosphor Bronze
Contact plating:Au Or Sn over Ni
Insulator Material:PBT+30%G.F UL94V−0

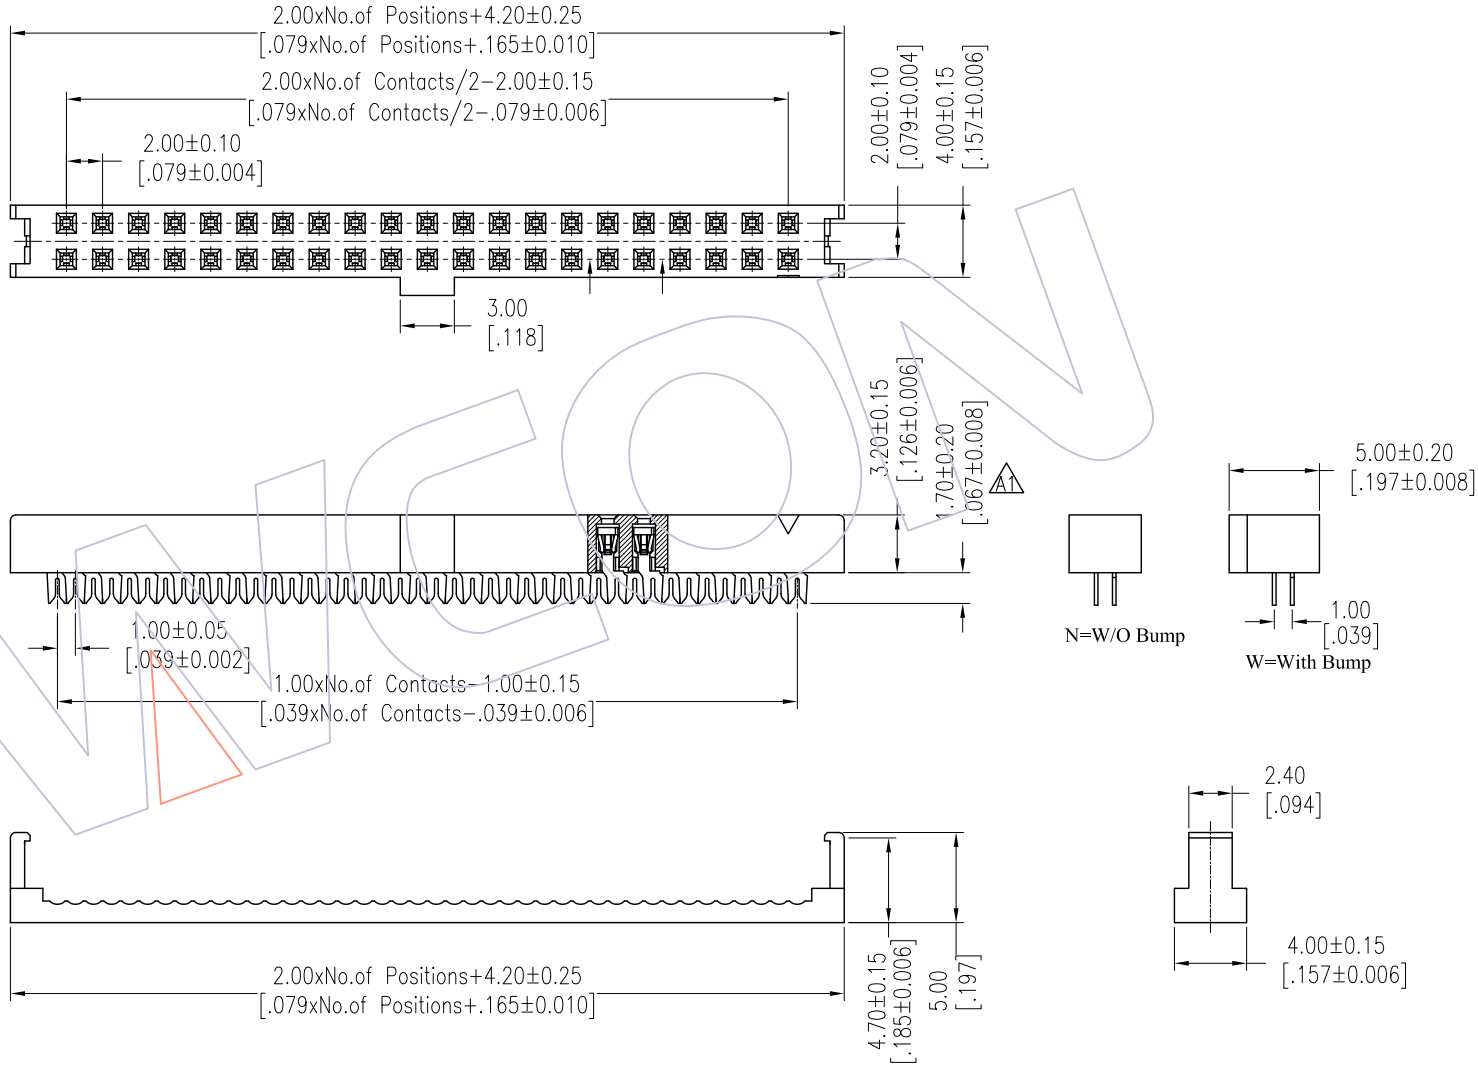

Ordering Information

5225- XX UP XX B X 0 1

No.of Pins	Contact Plating	Color Insulator	Bump
06P 24P	S0=Gold Flash/Ni	B=Black	N=W/O Bump
08P 26P	S3=10u"Gold/Ni	G=Grey(427C)	W=With Bump
10P 30P	S4=15u"Gold/Ni		
12P 34P	S5=30u"Gold/Ni		
14P 36P	SN=Tin		
16P 40P			
20P 44P			
22P 50P			

Item	Pitch	Mating
Standard	2.00	3124/3221
Alternate		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A1	2013/12/09	1.50±0.20−−1.70±0.20 A1	------
A0	2012/10/10	NEW	------

OPERATION		DRAW	DATE
X.X	±0.40	JYHuang	2013/12/09
X.XX	±0.25	CHECK	DATE
X.XXX	±0.15		
Angle	± 3°	APPROVE	DATE
DIM	TOL		

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

PART NO. 5225-XXUPXXBX01

TITLE: 2.00mm IDC SOCKET("S" TYPE)

Customer NO.

WCON
Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com